



1. Identify the guard location by the label located on the front top right-hand side of the packaging.

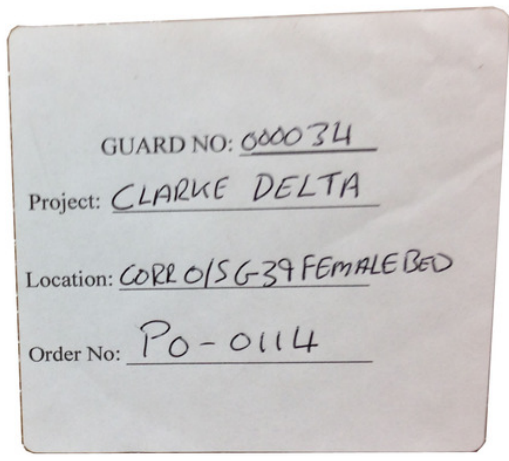

2. Unpack the guard ensuring to check the survey sheet located inside the guard packaging. Customer notes are identified.

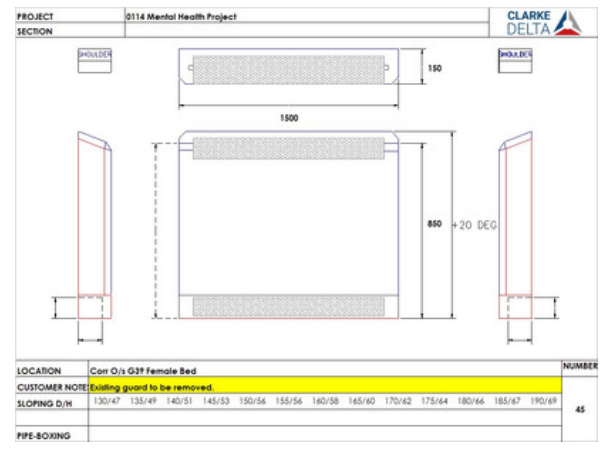

3. Place the assembled guard against the wall, and lightly pencil mark down either-side of the guard.



4. Separate the guard door, and the frame by using the guard key to unlock the door.



5. Place the guard frame against the wall, and align the sides with the previously marked pencil lines.



6. Pencil mark the fixing hole positions on the wall, through the holes in the frame returns.



7. Remove the frame from the wall, and drill the holes previously marked. Use the appropriate wall plugs, and secure the frame to the wall with suitable screws.



8. Place the door with the bottom lip overlapping the frame, and close. Ensure the frame sits on the inside of the door at either-side.



9. When closing the door, ensure that the tab on the frame sits into the cut-out on the door return lip.



10. Lock the door to the frame, ensuring all locks are in the locked position.



MULTIPLE PIECE GUARDS

- Secure the frames together using the nuts and bolts provided.
- Level the upright section of the frame, using plugs and screws secure the frame into position at the top.
- Place a fixing into the ground through the plinth either-side of the upright.
- Place the doors into position, close and lock.

